



BATH/SHOWER/WALL SPA/SINK SET


Congratulations for purchasing this quality bath/shower/wall spa or sink set. Our product is manufactured to the highest quality under strict quality control procedures.

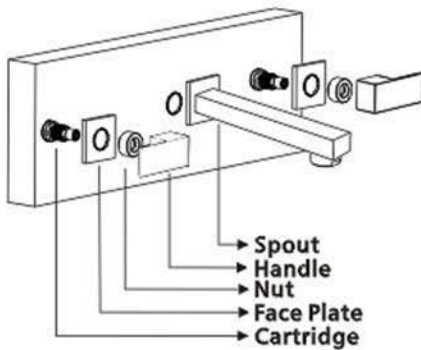

Bath Set

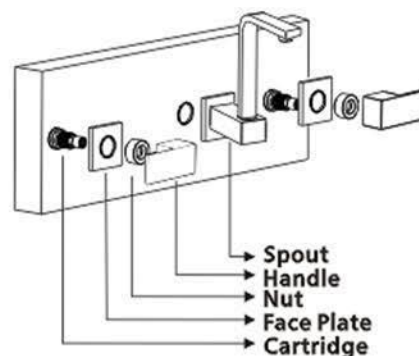

Wall Spa/Sink Set

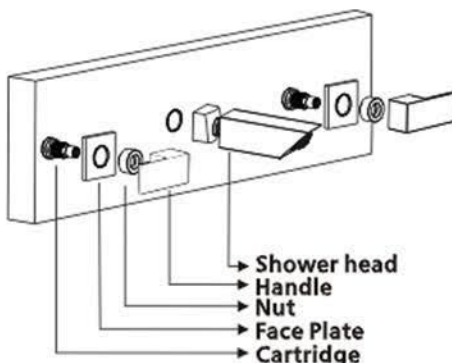

Shower Set

INSTALLATION INSTRUCTIONS

1. Install the cartridge onto the cartridge base in the wall and lock torque 10-12Nm;
2. Install the cartridge cover and lock torque 30-50Nm;
3. Install the face plate and nut;
4. Install the handle and lock the screw;
5. Install the spout/shower head.

IMPORTANT

Pressure & Temperature Requirements.

- * Hot and cold water inlet pressures should be equal.
- * Inlet pressure range: 100 – 800 kPa
- * New Regulation: -500 kPa maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500.1-2003, Clause 3.3.4)
- * Maximum hot water temperature: 80°C.