


FLS80-CH (Chrome)

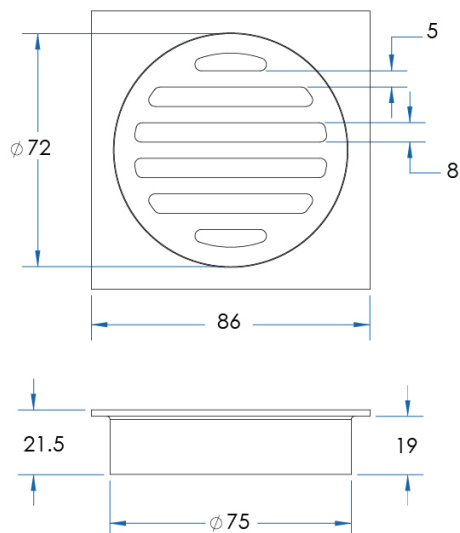

SPECIFICATIONS

Material Brass HBP59
Warranty 7 years replacement product

Finishes and Size Chart

Code	Waste Outlet
FLS80-CH	80

IMPORTANT

- Tile insert waste to be used in conjunction with a leak control flange, waterproofed as per requirements in AS3740 Waterproofing of Wet Areas.
- All Plumbing fittings must be installed to AS3500 Plumbing & Drainage Standard + any local regulatory requirements.
- Fit leak control flange inlet into the floor, so it can be connected to the outlet S-Trap or DWV waste pipe. Insert tile insert waste body so tile insert with tile sits level with finished floor height.

* Maximum barefoot live loading = 1Kn

DISCLAIMER

Installation must be carried out by a licenced tradesperson. Specifications and models may change without notice. All dimensions are nominal and subject to printing errors. Designed in Australia.

CASA LUSO

Due to our policy of continuous development, all designs and measurements are intended only as a guide and are subject to change without notice. Being hand made products they are subject to a size variance E&OE. This brochure is representative of the actual products at time of printing. Please confirm all particulars before purchase. Casa Lusso recommends having the product on site before commencing rough in.

Available at

hb Highgrove Bathrooms
www.highgrovebathrooms.com.au