


WALL HUNG TOILET BRACKET + CISTERN


For Pneumatic Wall Hung Pan Toilets

7
YEAR
WARRANTY

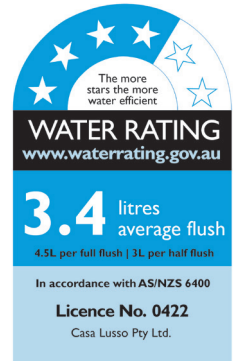

SPECIFICATIONS

WELS	WELS 4 Star, 4.5L/full, 3L/half, 3.4L/avg flush
Features	Designed for wall hung pan toilet suite. Adjustable support frame legs (up to 12cm). 8cm frame thickness. Inlet hole located at top.
Installation	For front actuation, dry wall & solid wall installation. Fasten distance for wall hung pan = 18 or 23cm. Floor construction (Up to 12cm) Supplied to suit pneumatic push plates specified below (sold separately).
Kit Includes	Pneumatic Cistern, Water supply angle valve, protection box for installation, installation plug, discharge bend and outlet, M12 fixation rods for toilet & fastening materials.
Code	K301A-Q
Warranty	7 year replacement product
Important	Installer must ensure that the frame is fixed appropriately to structure to be able to support 400kg on the pan.

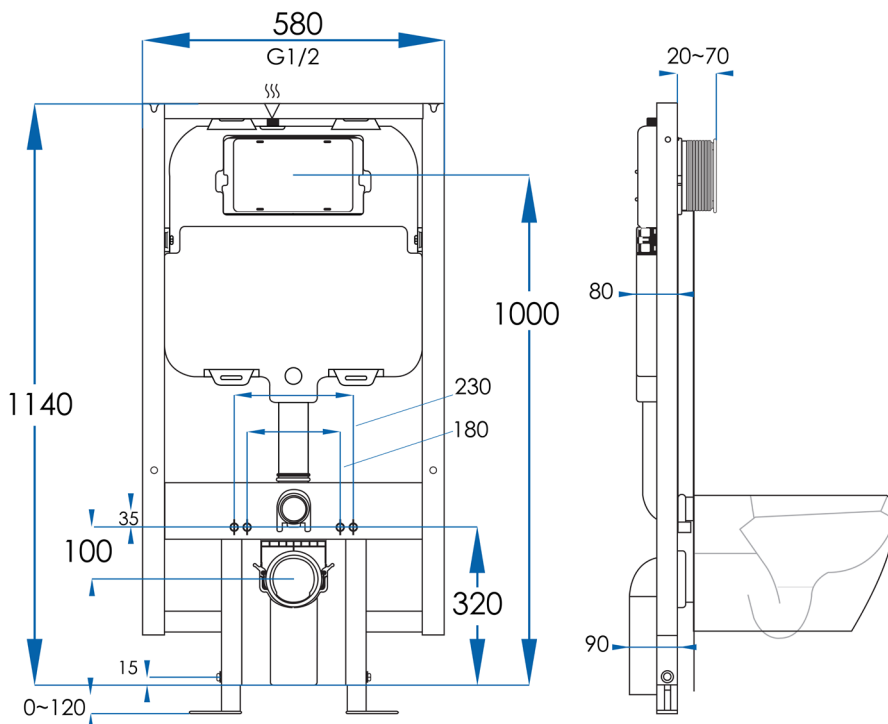

CASA LUSSO

Due to our policy of continuous development, all designs and measurements are intended only as a guide and are subject to change without notice. Being hand made products they are subject to a size variance E&OE. This brochure is representative of the actual products at time of printing. Please confirm all particulars before purchase. Casa Lusso recommends having the product on site before commencing rough in.

Available at

[hb] Highgrove Bathrooms
www.highgrovebathrooms.com.au