


CASA LUSSO

Concealed Pneumatic In Wall Cistern with Wall Bracket 80mm

Product Code: K301A-Q

CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE. WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP.

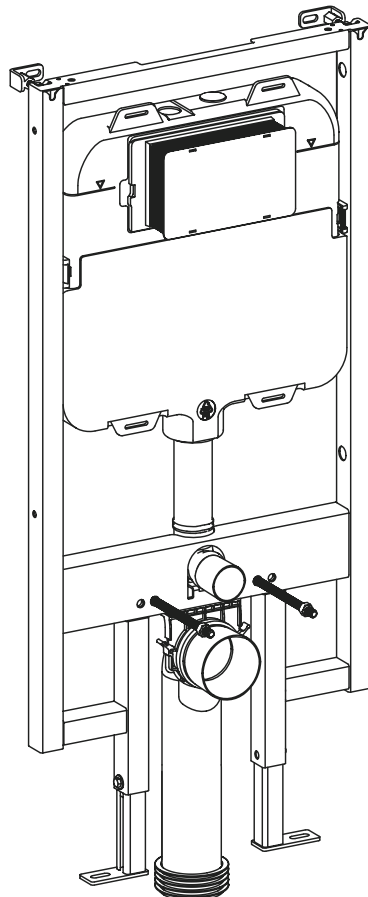

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.

Premium Warranty (Domestic Use) :

7 year Replacement product

Material: HDPE Construction

WELS 4 Star, 4.5L full, 3L half, 3.4 avg flush

Made to Australian Standards code:
AS 1172 WMK 26679

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings, washers, outlet valves, air tubes and rubber seals) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter/ amend this warranty offer in writing at any time.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

Pressure and Standards Requirements

1. Inlet pressure range 100 - 500kpa
2. AS/NZS3500 requires that all water inlets within a house must be limited to 500kpa
3. Toilets must be installed by qualified trades people to the applicable standards
4. STANDARDS REFERENCES AS/NZS3500, AS/NZS1172, AS6400

To the Installing Plumber:

Please leave this instruction booklet for the customer.

Prior to Installation

(Visual Inspection) & Installation requirements:

1. When the product has been unpackaged from packaging, please inspect the product to ensure it is in good order and condition and that all parts required for correct installation have been supplied. Any product that is faulty or has parts missing is to be returned to the store of purchase.
2. Sanitary ware products must be installed by a licensed plumber in accordance with the relevant installation instructions and all Australian Standards and local authority requirements. Failure to follow the relevant installation instructions, Australian Standards and local authority requirements will void the warranty and all-associated costs will be transferred to the end user.

INSTALLER PLEASE NOTE

This product must be installed by a qualified plumber. Read all installation instructions carefully before commencing installation.


Careful attention must be given to the dimensions of pan and plumbing connections, finished floor heights, finished wall thickness and available space in wall.

Special attention must also be given to the following:



1. Minimum overall wall lining thickness is 20mm (e.g. wall lining + tile).
2. Because the weight of a wall hung toilet pan can crush the wall lining if a plaster board is used, wall hung pans must only be installed against a cement based non-compressible wall lining.
3. Front face of frame for wall hung pans must be installed flush with front face of timber framing.
4. Pipeline must be flushed to clear debris before connecting to cistern.
5. Cistern operation must be tested before wall covering is finished.
6. After testing ensuring stopcock is fully closed and cistern is emptied.

Water pressure must be limited to 500kpa in accordance with AS/NZS3500.

Maximum operating pressure 1000kpa


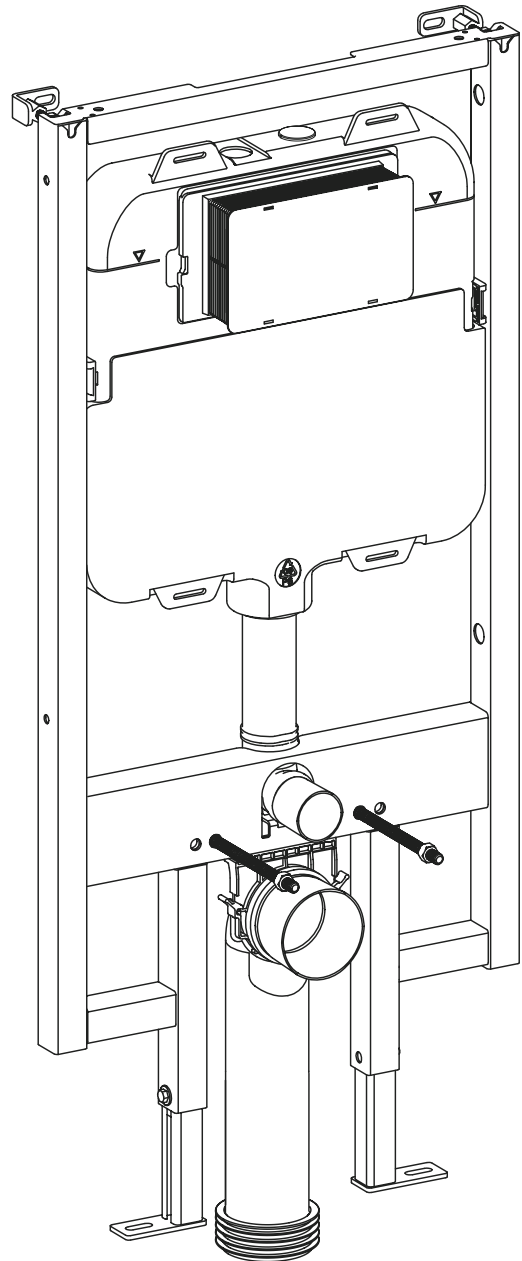


⚠ Wall Hung Toilet Installation

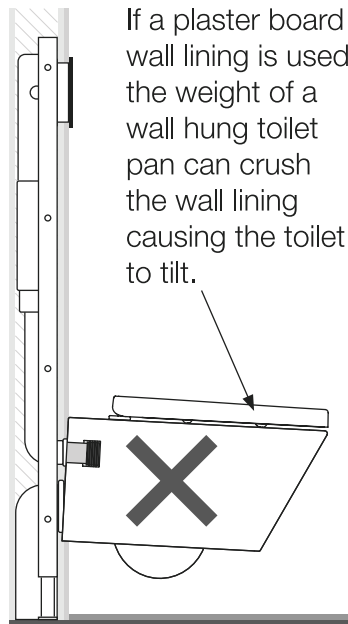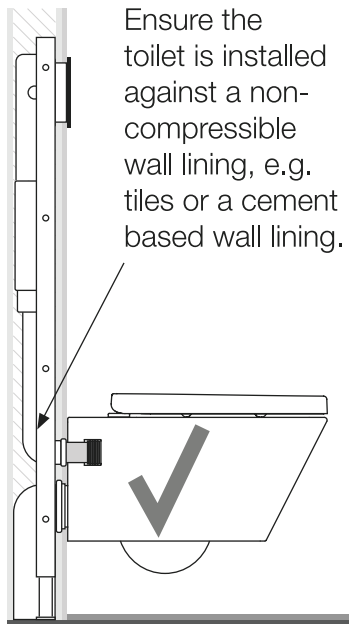

⚠ Minimum Wall Lining Thickness



The minimum overall wall lining thickness required for flush panels is 20mm. If it is less than 20mm the flush panel will protrude from the wall.

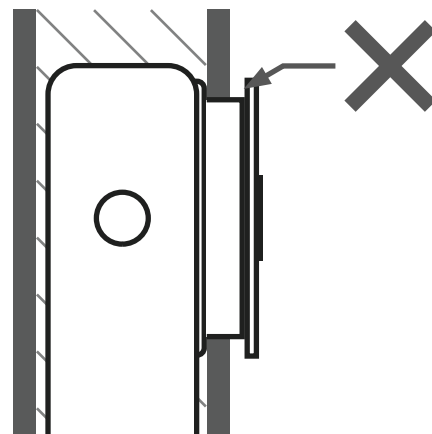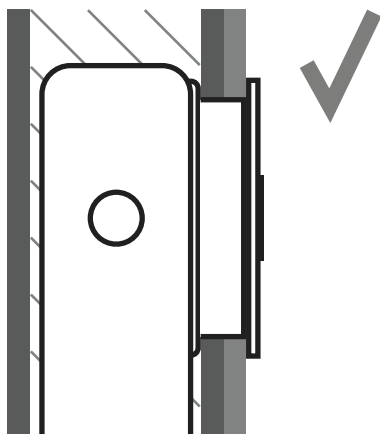

CASA LUSSO

Concealed Pneumatic In Wall Cistern with Wall Bracket 80mm






Product Code: K301A-Q

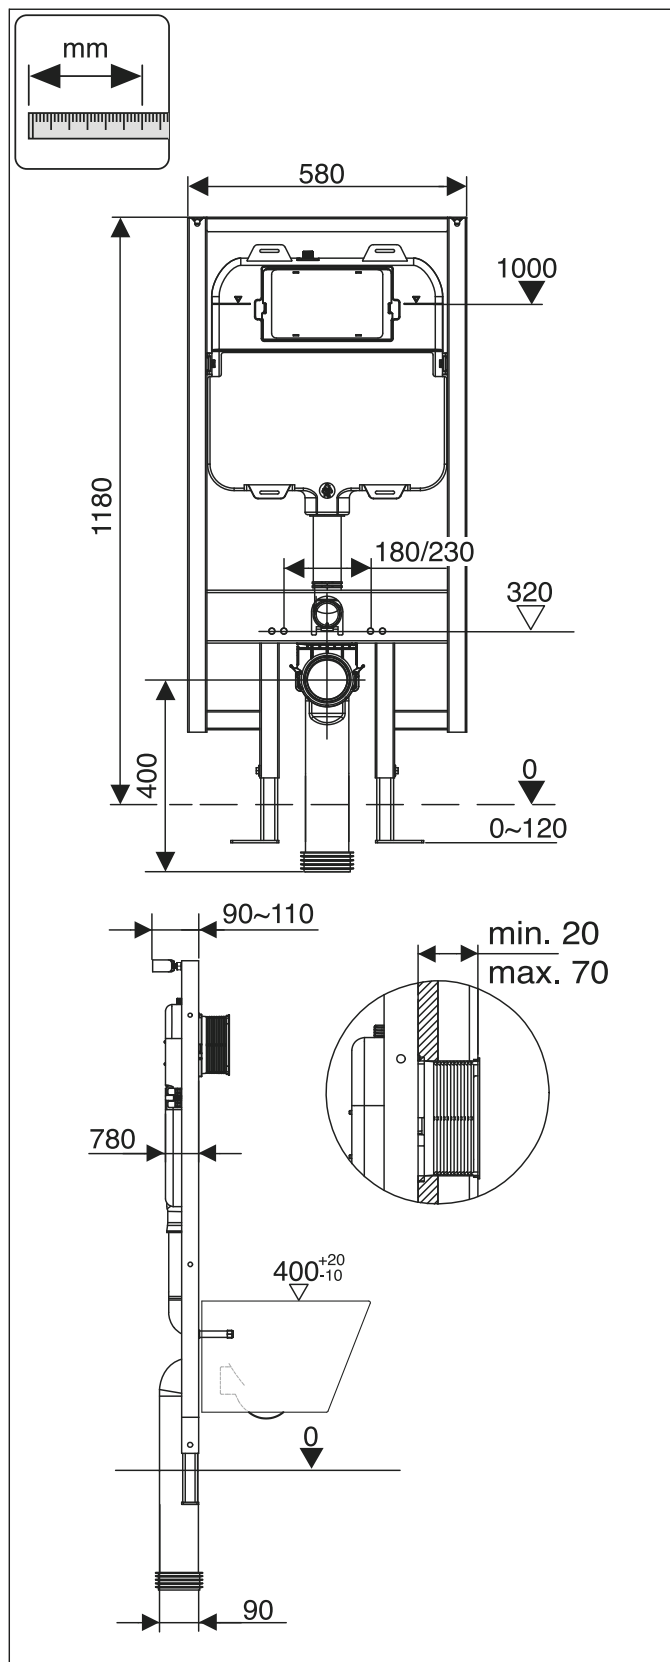
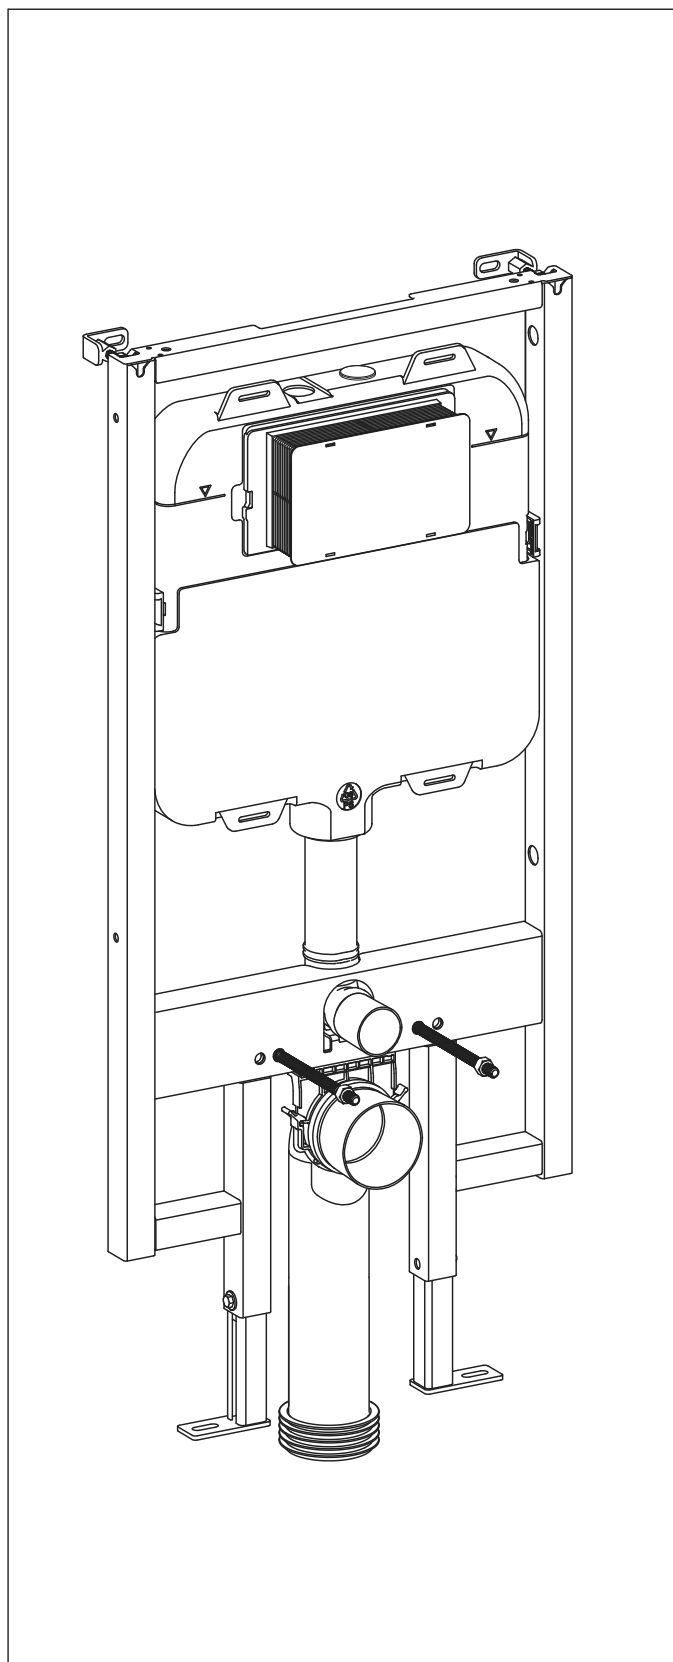


FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES



INWALL CISTERN INSTALLATION (e.g. when installing inside a timber wall)

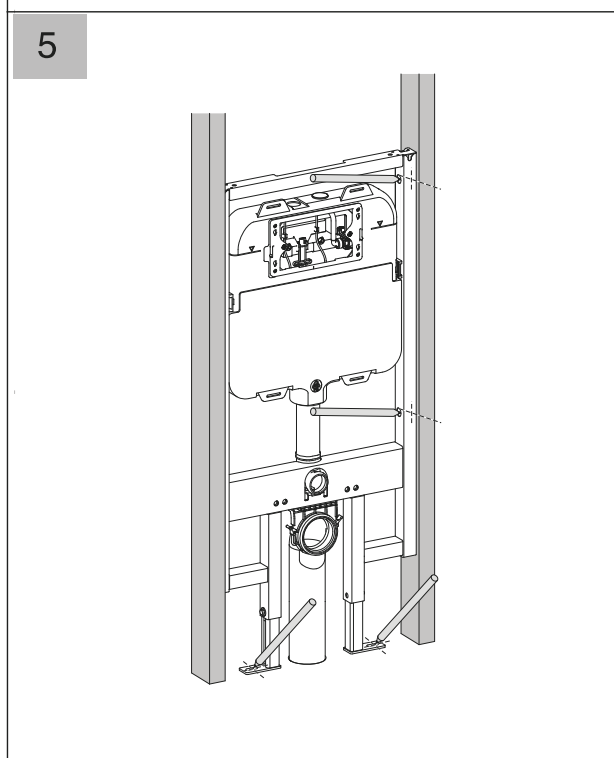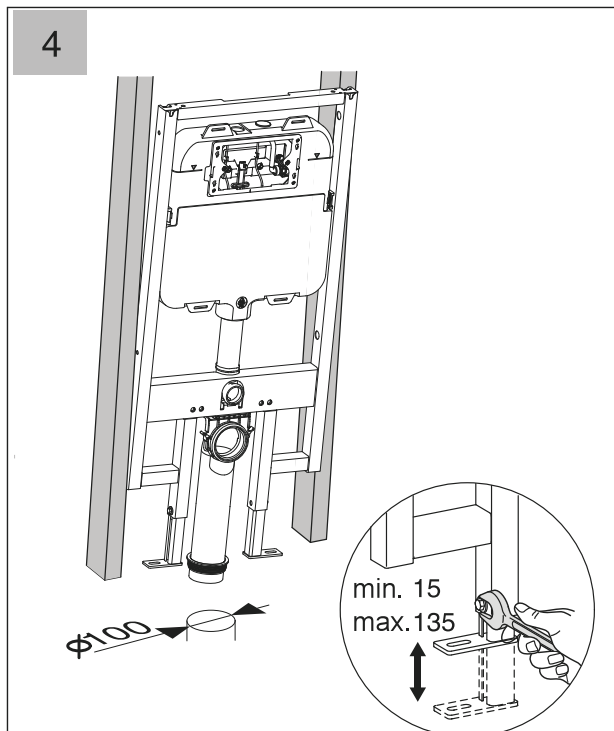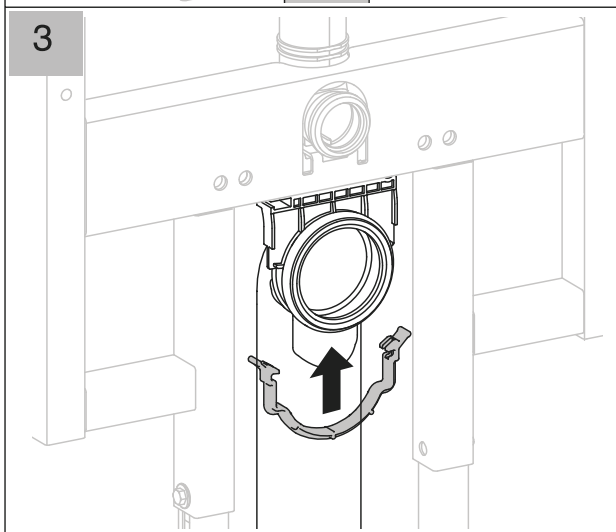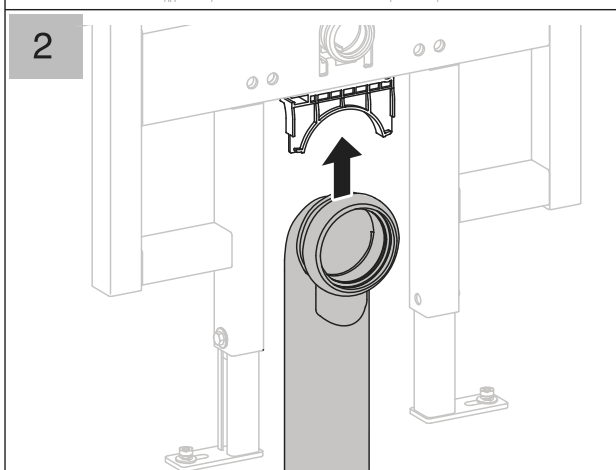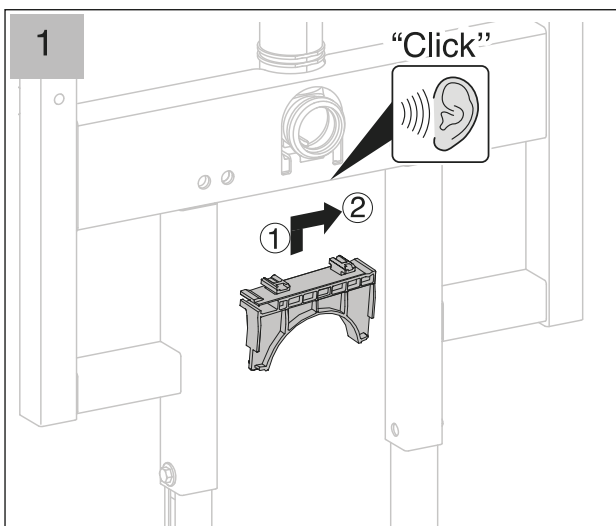

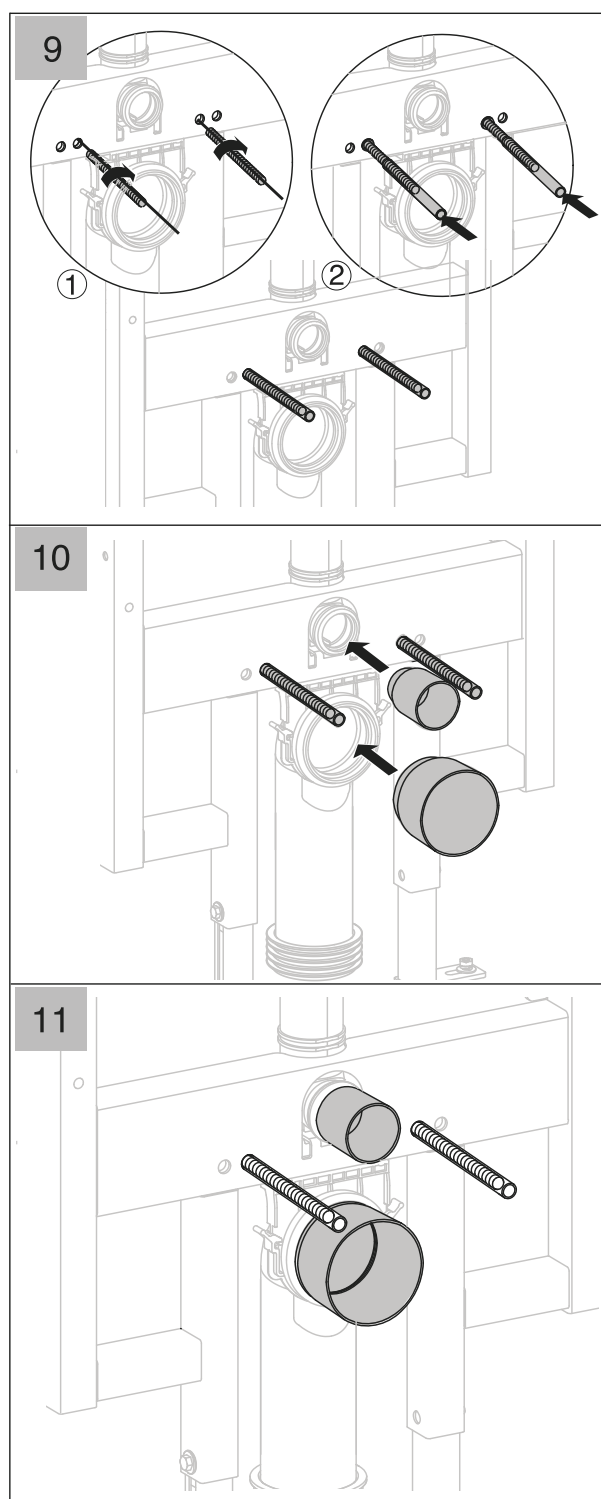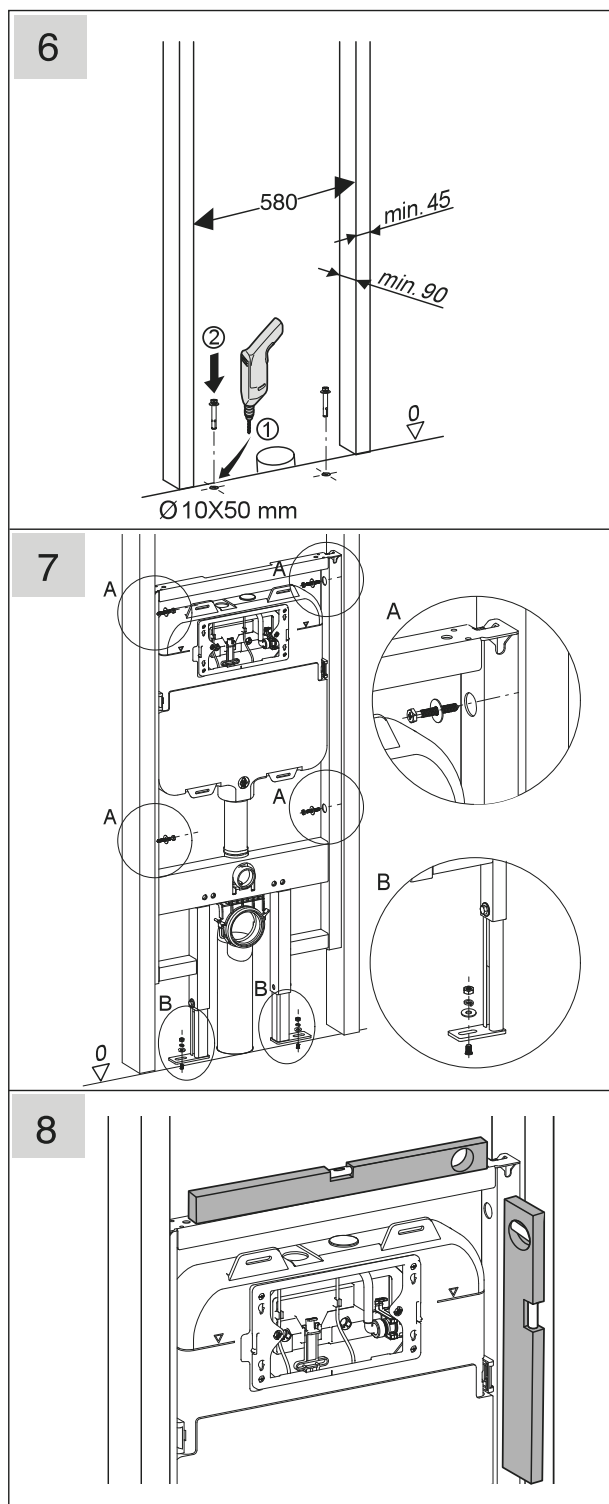


CASA LUSSO


Concealed Pneumatic In Wall Cistern with Wall Bracket 80mm

Product Code: K301A-Q


12

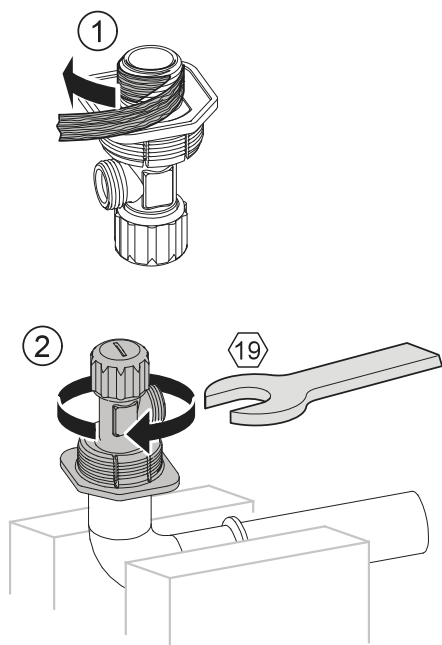


14

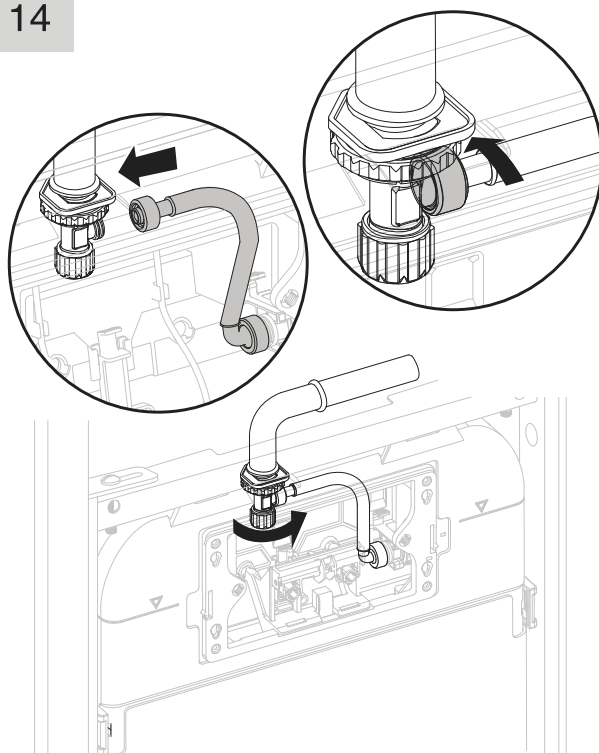


13

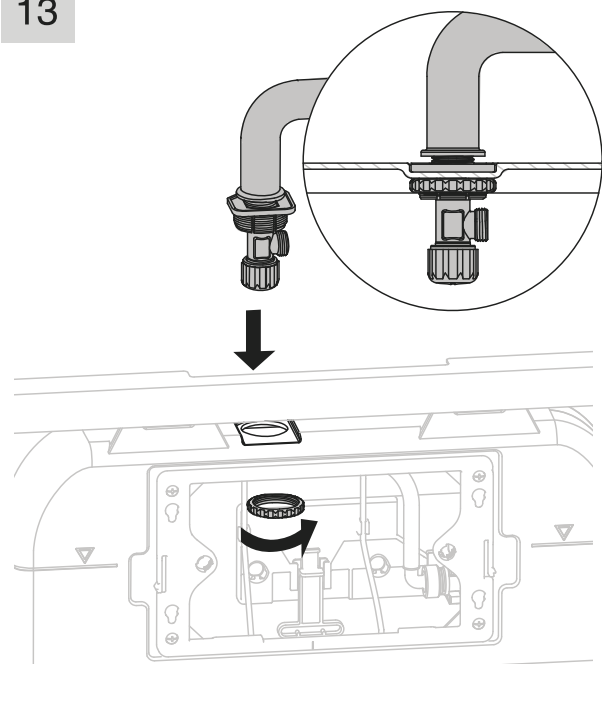

15

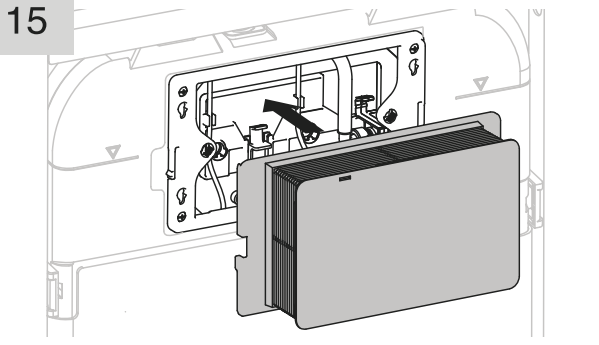

16

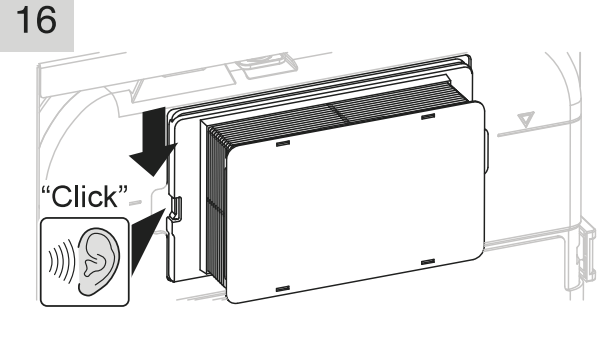


FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

CASA LUSSO


Concealed Pneumatic In Wall Cistern with Wall Bracket 80mm

Product Code: K301A-Q

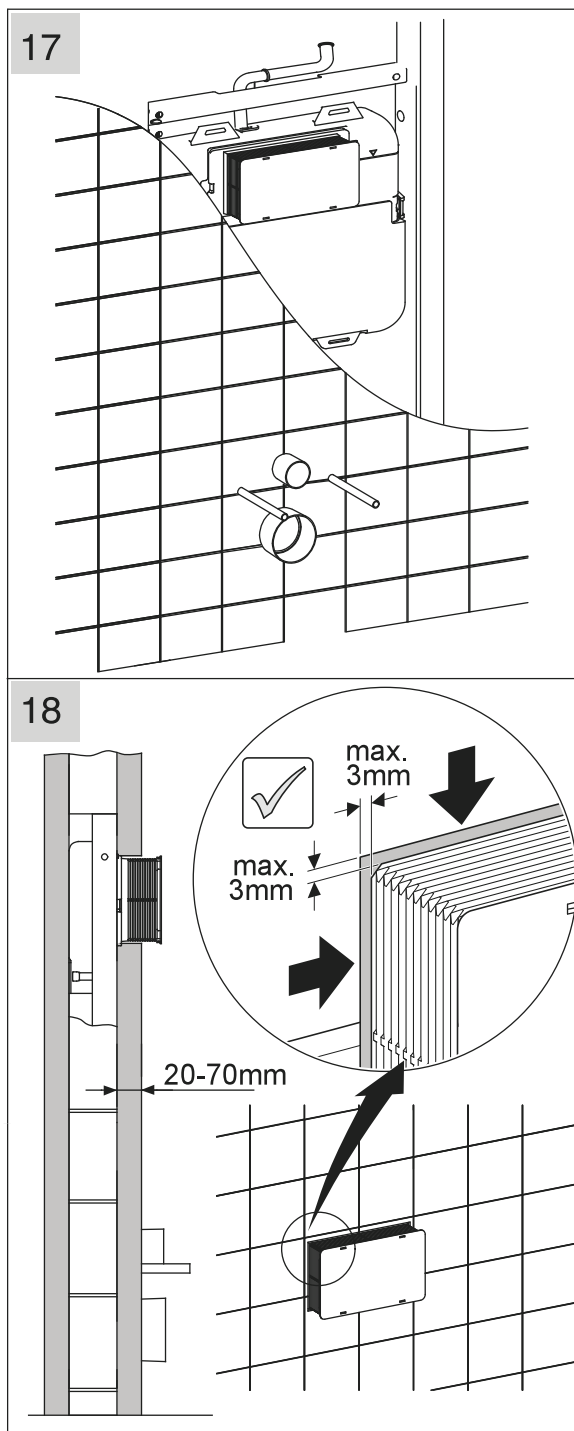


FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES


1

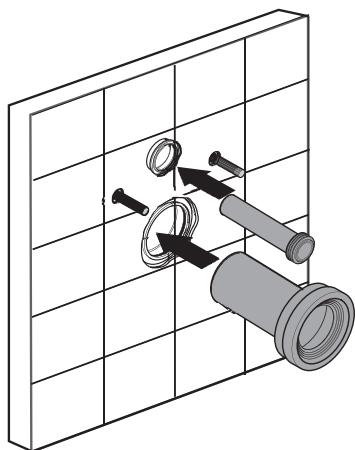


2

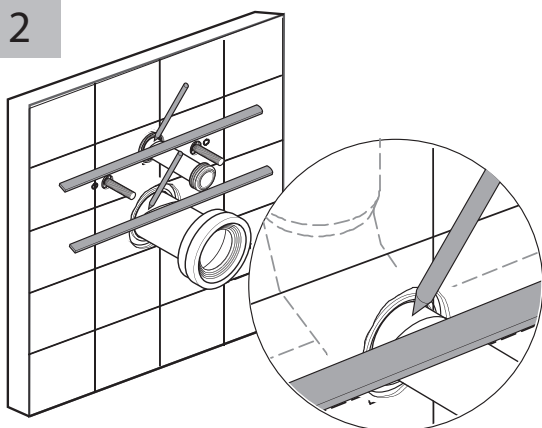


3

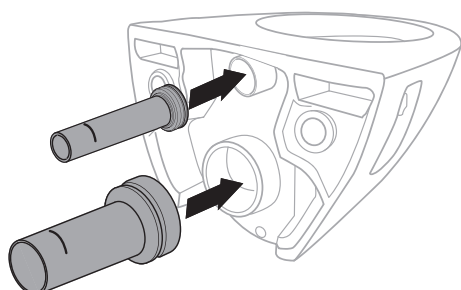


4

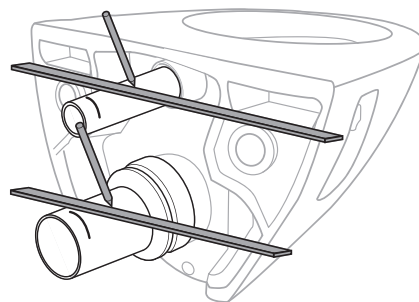

5

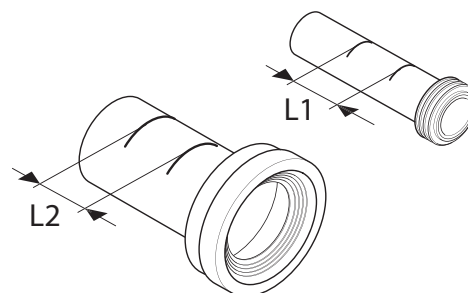







6

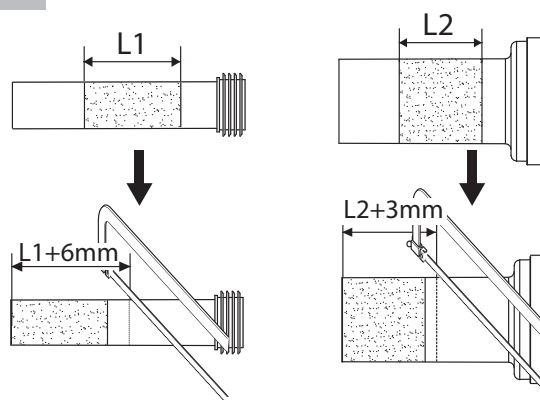

CASA LUSSO

Concealed Pneumatic In Wall Cistern with Wall Bracket 80mm

Product Code: K301A-Q

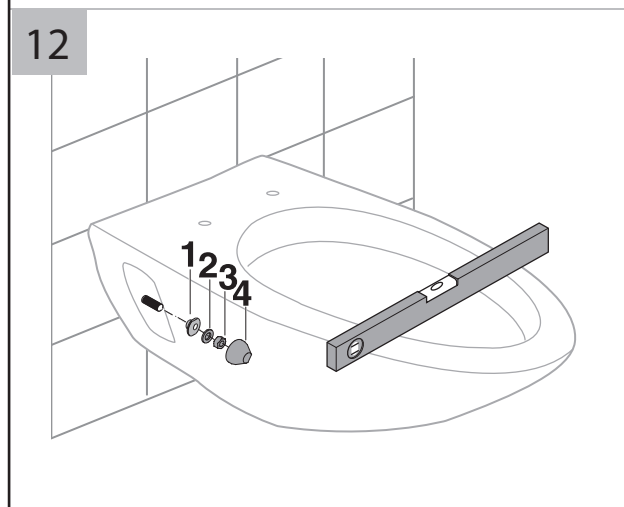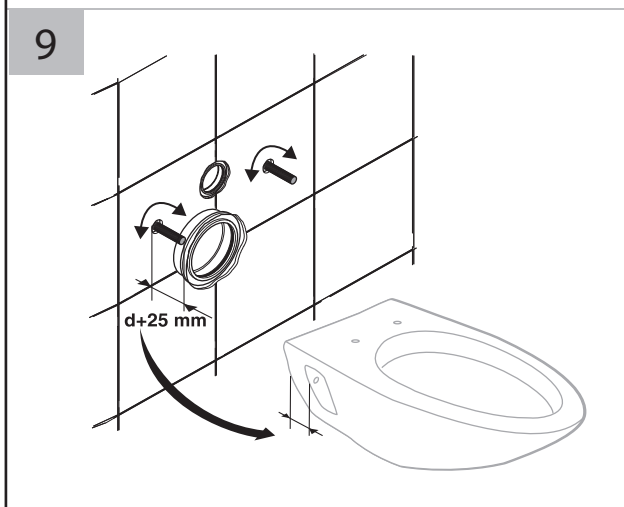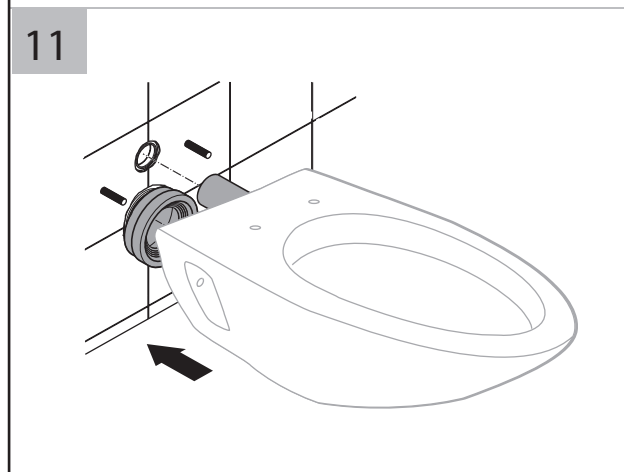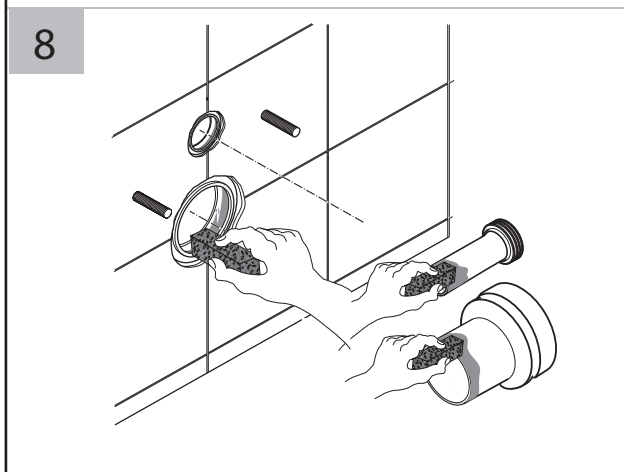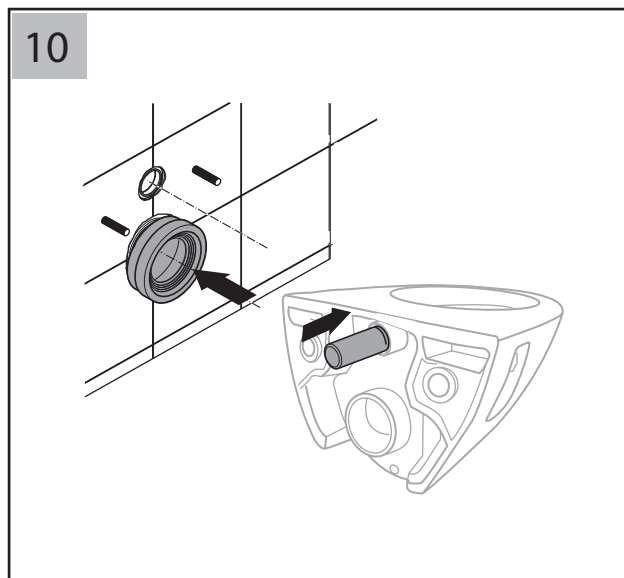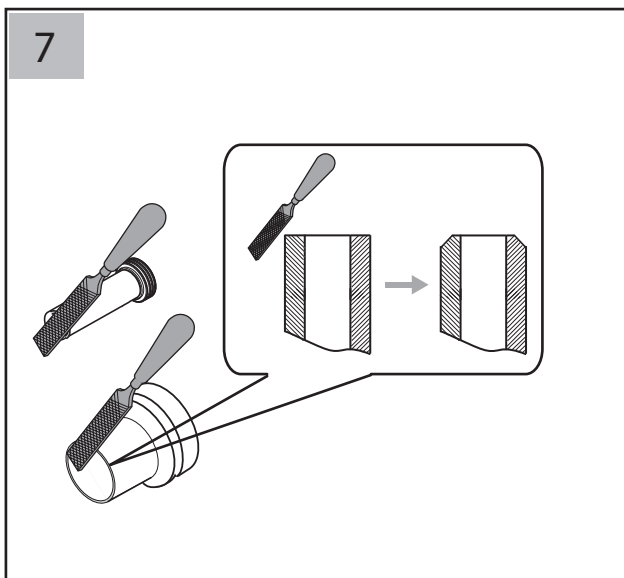

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES