
Casa Lusso

Mirror Installation Instructions

CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO MIRROR. WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US FOR ANY FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED UNDER THE HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP.

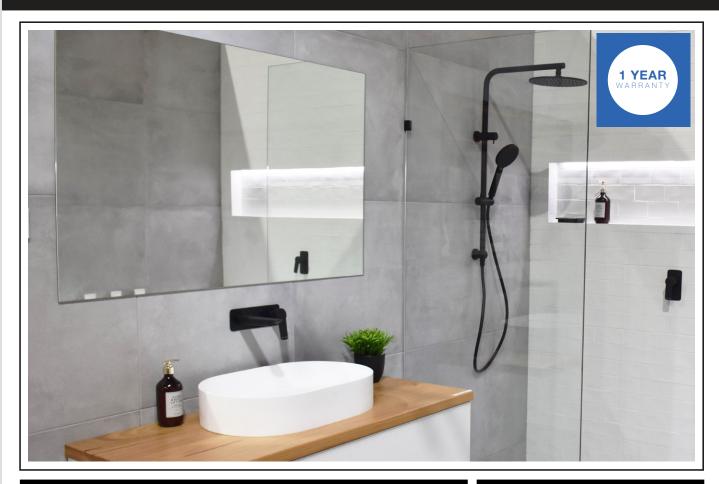

GENERAL INFORMATION

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;

Important:

- Mirrors are Extremely Fragile
 Take Care While Transporting and Handling Mirrored Goods.
- This product should be installed by a licensed Tradesperson.

To tradesperson: Please ensure a copy of the installation instructions is left with the end user for future reference.

FEATURES

Material: Glass mirror with copper-free backing

Installation: Wall Mount

Includes: Mirror only

Premium Warranty (Domestic Use):

1 year replacement only

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES



PRIOR TO INSTALLATION


Remove Mirror from packaging and check for any damage, if there is any damage do not install the product and arrange return of product.

Mirror glass is very easily damaged and when broken is very sharp, therefore ensure that personal protection gear for wrists, hands and eyes is worn when handling this product.

Ensure the wall is free from dust. Paint must be more than 14 days old. Use a level to ensure that the wall has no bows that will prevent the mirrors installation.

INSTALLATION GUIDE

- 1. Measure the desired height of the bottom of the mirror.*
- 2. Cut two timber props 1-2mm less in height. *
- 3. Using a small amount of double-sided tape attach these props to the wall and sitting on bench 100mm in from the mirror width.*
- 4. Place a level on these props to ensure they are level. Install plastic packers on top of the wooden packers to ensure both are level and raised to the required height.*
- 5. Measure to establish the side location of the mirror edge.
- 6. Use non-permanent marker and level to make a small mark about 100mm on the wall up from the bottom of the mirror. Test this marker will not stain your tiling or finished wall.
- 7. Place a small amount of double sided tape onto a wooden block
- 8. Attach the block to the wall with the edge of the block on the line previously marked.
- 9. Apply double sided tape to the rear of the mirror as indicated.
- 10. Apply silicone to the mirror glass **NOT** to the vinyl backing.

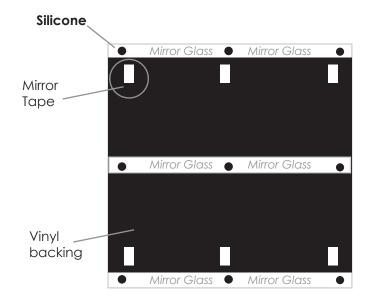




* Silicone should be installed as a blob developing into a peak as indicated.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES



IF INSTALLING ABOVE BENCH TOP CONTINUED ...

11. Lift the mirror with the top tilting slightly backward.(picture)

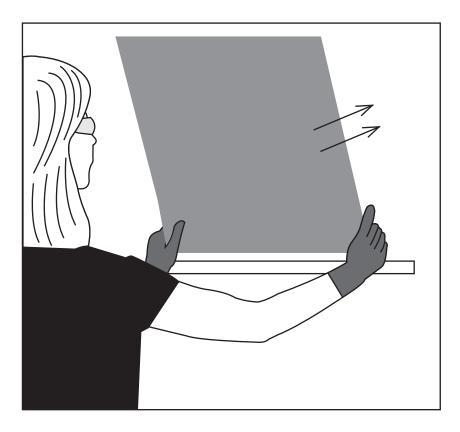

- 12. Place the bottom of the mirror onto the wooded props so the edge of the mirror lines up against the wall guide.
- 13. Tilt the top of the mirror to make contact with the wall.
- 14. Press firmly on the mirror in the location of the silicone blobs.
- 15. Do Not bang or hit the mirror as it will break.
- 16. When installed the wooden side guide may be removed.
- 17. Leave the wooden props in place for 48 hours prior to removal.
- 18. When removing the wooden props remove the plastic packers first to provide clearance for the timber props.
- 19. Place silicone down both sides of the mirror.
- 20. Spray with soapy water and wipe clean the excess silicone.
- * If you are installing the mirror directly onto the bench top, steps 1-4 is not required. Proceed installation from step 5.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES