

CASA LUSSO

SPIN Pull Down Sink Mixer - Installation Instructions

**CONGRATULATIONS ON THE PURCHASE OF YOUR NEW CASA LUSSO TAPWARE,
WE HOPE YOU AND YOUR FAMILY ENJOY YOUR NEW PRODUCT AND CONSIDER US
FOR ANY FUTURE PROJECT. CASA LUSSO PRODUCTS HAVE BEEN MANUFACTURED
UNDER THE HIGHEST STANDARDS OF QUALITY AND WORKMANSHIP**



Brushed Nickel
SPD120-BN



Matte Black
SPD120-MB



AS 3718
WM 30023
CASA LUSSO

GENERAL INFORMATION

MAINTENANCE

- Clean regularly using mild soap and dry with a soft cloth.
- Do not use abrasive cleaners, harsh detergents or citrus based cleaners on any products as these will scratch the surface.
- Tightening or adjustment of Tapware over time is considered general maintenance.
- Failure to clean/replace aerators/flow restrictors as required will void warranty.
- Damage to finishes that arise from installation or post installation will void warranty.

The warranty will not apply if:

- The product has been damaged by improper use;
- The product has not been used in accordance with any applicable instruction guide;
- The purchaser has attempted to modify or repair the product;
- The purchaser has failed to observe the cleaning and maintenance guidelines;
- The product is not installed by a licenced Plumber.
- Flow controllers/ aerators not regularly cleaned/ replaced.

Product warranties are personal to the person who acquires the product for their own consumption or use and not for resale or resupply. Claims with this product cannot be made by anyone other than the consumer. Where a product is covered by parts and labour warranty, the warranty covers both the repair of the defective part or the provision of a spare part to replace the defective part and the installation of that part. Where a product is covered by parts only, the warranty covers both the repair of the defective part or the provision of a spare part in replacement. It does not include the removal of the defective part or the installations of the repaired or replaced part. We reserve the right to provide minor components (e.g. handles, aerators, hoses, dress rings and washers) as 'Parts Only' to the customer. Casa Lusso reserves the right to alter, or amend this warranty offer in writing at any time.

FEATURES

Product Code: SPD120-BN / SPD120-MB

Premium Warranty (Domestic Use) :

15 year Ceramic cartridge replacement only
7 year Replacement products and parts¹
1 year parts & labour²


Material: Solid Brass Construction

WELS: WELS 6 Star, 4.5 litres per minute

Made to Australian Standards code:
AS 3718
Water supply - Tapware WM 30023

¹ Excludes Damage to ceramic disk cartridges from pieces of copper tube, plastic tube, sand, dirt or thread tube etc.
All speciality finishes are subject to 2 year replacement product and parts and 1 year replacement product and parts & labour. ² Jumper valves and ceramic disk spindles; 1 year parts only.

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES

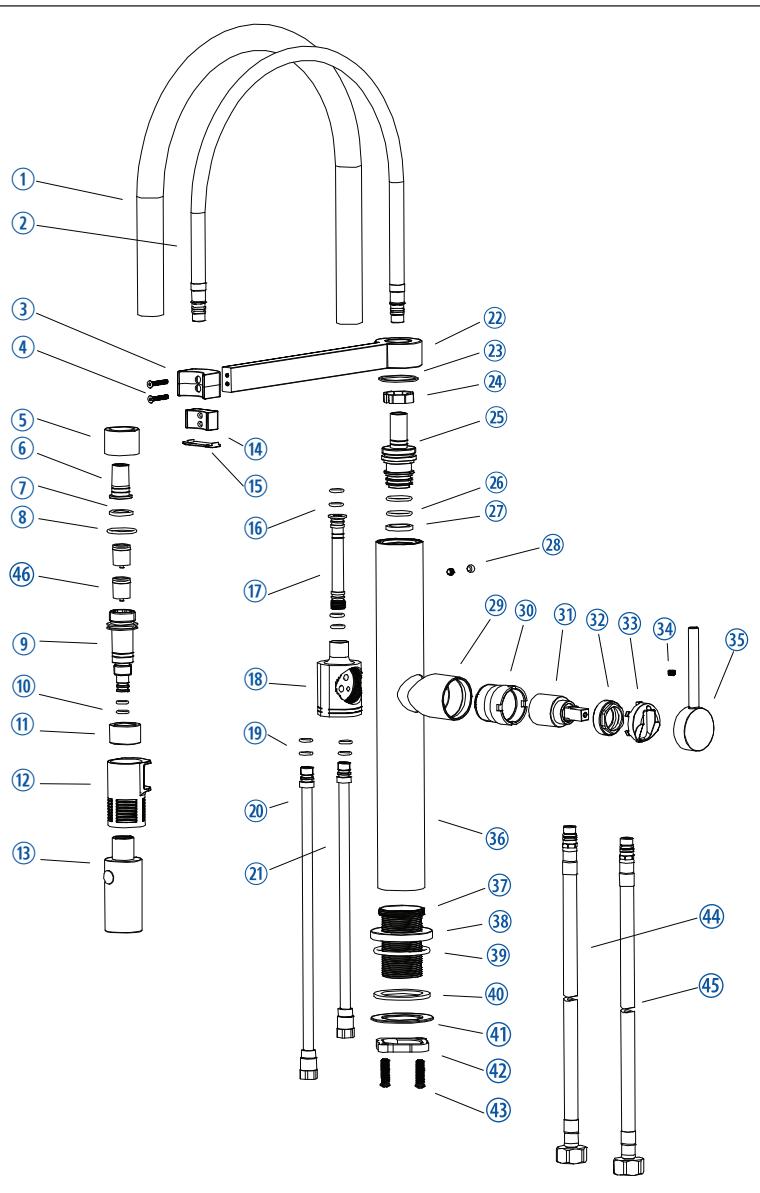

CONTENTS

①	Silicon Gel Pipe	②4	Washer
②	Hose	②5	Bush
③	Magnet Seat	②6	O-Ring
④	M3*10 Screw	②7	Washer
⑤	Union Nut	②8	Plug Botton Kit
⑥	Bush	②9	Bush
⑦	Washer	③0	Bush
⑧	O-Ring	③1	Valve
⑨	Bush	③2	Nut
⑩	O-Ring	③3	Bonnet
⑪	Round Iron	③4	M5*4 Screw
⑫	Connecting Sleeve	③5	Handle
⑬	Spray	③6	Valve Body
⑭	Magnet	③7	Shank
⑮	Escutcheon	③8	Base Escutcheon
⑯	O-Ring	③9	O-Ring
⑰	Connect	④0	Washer
⑱	Valve Body	④1	Washer
⑲	O-Ring	④2	Nut
⑳	Inlet Assy	④3	Screw
㉑	Inlet Assy	㉔	Inlet Hose (Cold)
㉒	Bracket	㉕	Inlet Hose (Hot)
㉓	Washer	㉖	Check Valve

INSTALLATION

1. Install the flexible hoses into the mixer and hand tighten in place. The flexible hoses are to be fitted into the correct inlets for hot water and for cold water (Red band for hot and blue band for cold).

DO NOT USE SPANNER TO TIGHTEN AS IT CAN DAMAGE THE O RING

2. Place the mixer into position and secure using the horse shoe and fixing nut.

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

3. Ensure gauze strainers are placed into the flexible hoses then connect the isolating taps.

IMPORTANT

IT IS IMPORTANT TO FLUSH OUT THE WATER PIPES BEFORE INSTALLING THE MIXER.

- Hot and cold water inlet pressures should be equal.
- Inlet pressure range: 150 – 500 kPa
- New Regulation:
500 kPa maximum operating pressure at any outlet within a building. (Ref. AS/NZS 3500)
- Maximum hot water temperature: 80°C.

ALL INSTALLATIONS MUST COMPLY WITH AS/NZS3500

FAILURE TO COMPLY WITH ANY OF THE ABOVE INSTRUCTIONS WILL VOID ALL WARRANTIES